



Thread Master AW-69 Semi-Automatic

■特性:

特製滾筒系統

1. 特製滾筒系統導線，減少磨擦起毛。
2. 高速運轉，低噪音，繞線區不受污染。



■MAINFEATURE:

DRUM TRAVERSE SYSTEM

1. THE PRECISE SLIT DRUM TRAVERSE GUIDE SYSTEM, NO NAP HAPPENED.
2. HIGH SPEED, LOW NOISE AND SOILLESS IN WIND AREAS.

EASY-TAKING BOBBIN MAGAZINE

3. POSITIVE CONE SUPPORT AT BOTH ENDS, MANUAL CHANGE THE CONES, SIMPLE AND EASY.
4. WITH EASY-TAKING BOBBIN MAGAZINE ON EACH SPINDLE.

NICE PACKARE SHAPES

5. INDIVIDUAL OPERATION EACH SPINDLE, WITH YARN COUNTER FOR PRESET THE LENGTH MAKE UP. ACCURATE AND RELIABLE.
6. WITH ELECTRIC TENSION. TENSION ARE SINCHRONIZED TO REDUCE GRADUALLY WHILE THE PACKAGE MAKE UP INCREASING TO ENSURE THE SMOOTH OF SURFACE AND SQUARE SHOULDER EDGES.
7. DENSITY ADJUSTING DEVICE, PRECISE, STABLE AND RELIABLE.
8. WITH AUTO STOP MOTION OF YARN SENSOR WHEN YARN BROKE AND OVER LARGE PACKAGES.

LUBRICANT OF OIL TANK

9. STANDARD MACHING WITH VACUUM TYPE OIL TANK TO SUPPLY OIL TO LUBE THE THREAD ON EACH SPINDLE. THE PERCENTAGE OF LUBRICANT ARE EASILY TO SET UP AND ADJUSTABLE. WITH AUTO CIRCULATING LUBRICANT SYSTEM AND TANK ARE AVAILABLE ON OPTIONAL. (ONE TANK CONNECTING 16 SPINDLES)
10. HIGH EFFICIENCY, EASY OPERATION AND LOW COST MAINTENANCE.

特製油槽裝置

9. 油槽裝置，可隨意調整上油率，加裝自動循環過濾系統，另計費。
10. 操作簡單，保養容易。



AUTO CIRCULATING LUBRICANT TANK (OPTIONAL)



Thread Master AW-69 Semi-Automatic


其他特性/Other characteristics

- 高速度，高效率，保養容易，維修成本低，提升產品競爭力。
- 成形美觀，提高產品品質。
- 適用各種規格S.P.線、尼龍線、繡花線等。

- HIGH SPEED, HIGH EFFICIENCY, EASY AND LOW COST OF MAINTENANCE TO INCREASE THE COMPETITION OF SEWING THREAD.
- EXCELLENT PACKAGE WOUND UP EACH CONE, UP-GRADE THE QUALITY OF SEWING THREAD.
- SUITABLE FOR ALL KINDS OF S.P. THREAD, NYLON THREAD, EMBROIDERY THREAD OF RAYON AND POLYESTER FILAMENT ETC....



機器外觀尺寸圖/Foundation Data

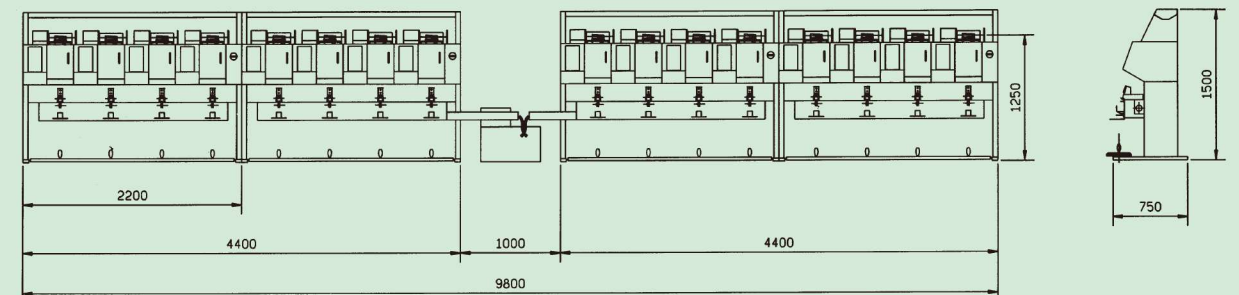

■MAIN SPECIFICATIONS:

		AW-69(CONE)	AW-69K(KINGSPool)
錠數	NO.OF SPINDLE	4sp.	4sp.
捲取角度	PACKAGE OF CONICITY	0°0' 2°20' 3°30' 5°57'	KINGSPool
最大捲取外徑	MAX.WOUND UP DIA.	5" or 127mmØ	5" or 127mmØ
主軸速度	SPINDLE SPEED	8000-10000rpm.	8000-10000rpm.
送紗速度	YARN DELIVER SPEED	1000~1200m/mim	1000~1200m/mim for Nylon Thread. 750m/mim for Rayon Thread.
橫動量	AVAILABLE TRAVERSE	4"	3" 4"
產量	CAPACITY	125lbs/4sp/8 hours for S.P. Thread 40/2s	296lbs/4sp/8 hours for 210D/3 Nylon Thread and 158lbs for Rayon 120D/3
需用馬力	POWER REQUIRED	1HP/Set (1/4hpX4)	1HP/Set (1/4hpX4)
重量	WEIGHT	N.W. : 580 KGS	G.W. : 650 KGS
材積	MEASUREMENT	2.26 mL X 0.85 mW X 1.78mH	
選加配備		OPTIONAL AVAILABLE:	
1. 加熱循環系統		1.HEATER ELEMENTS OF LUBRICANT SYSTEM.	
2. 自動過濾循環系統		2.AUTO CIRCULATING LUBRICANT SYSTEM.(COOL LUBRICANT)	

※THE MODEL AW-F5 GOOD FOR 5" & 6" TRAVERSE A&Y CONES※